



BioBacta



Journal of Bioscience and Applied Research

www.jbaar.org



Estimating Ground water Balance in the Presence of Climate Change Impact: A Case Study of Semi-Arid Area

Mohammed Nanekeley¹, Furat Al-Faraj^{1,2,*}, and Miklas Scholz^{3,4}

¹Civil Engineering Research Group, School of Science, Engineering and Environment, The University of Salford, UK
The University of Salford, Newton Building, Salford M5 4WT, UK; m.a.a.nanekeley@edu.salford.ac.uk

²School of Engineering, The University of Bolton;
The University of Bolton, Bolton BL35AB, UK; f.al-faraj@bolton.ac.uk

³Division of Water Resources Engineering, Faculty of Engineering, Lund University;
Department of Civil Engineering Science, School of Civil Engineering and the Built Environment, University of
Johannesburg

⁴Lund University, P.O. Box 118, Lund 221 00, Sweden;
Kingsway Campus, PO Box 524, Auckland Park 2006, Johannesburg, South Africa
m.scholz@salford.ac.uk

*Correspondence: f.al-faraj@bolton.ac.uk; f.a.m.al-faraj1@salford.ac.uk

Abstract

The exploitation and management of groundwater in an integrated manner is gaining global interest. Rapid population growth is frequently linked to climate change. In order to meet the growing demand for public water supply and irrigation, especially in arid and semi-arid climate regions, groundwater is used excessively. This paper considers Erbil province of the Iraqi Kurdistan Region as a representative case study for semi-arid climate areas where current practices of groundwater resources utilisation lack a solid regulatory framework and where monitoring systems are often absent. The role of climate change in the assessment of aquifers is assessed. Long-term average recharge and extraction rates in relation to groundwater storage have been evaluated with the aim to avoid adverse long-term impacts on groundwater resources. A groundwater balance method has been used to quantify the storage of groundwater within aquifers. Results revealed that there is a considerable imbalance between the input (groundwater recharge) to the Erbil province aquifers and corresponding output (groundwater withdrawn). The reduction of losses in water use, increases in irrigation efficiency, raising of public good water-use practices, and the establishment of a regulatory framework to appropriately manage groundwater resources are outlined.

Keywords: *Arid and semi-arid region; Climate change; Groundwater depletion; Groundwater storage and recharge; Effective infiltration; Effective precipitation; Regulatory sustainable groundwater strategic framework*

1 INTRODUCTION

Proper management of groundwater resources requires thorough knowledge and detailed information on aquifer characteristics, long-term behaviour of the aquifer, and groundwater quality and quantity. Additionally, groundwater management requires investigations on population growth coupled with urban development, the land-use change and practices, and climate alteration and variability have considerably contributed to over-exploitation of groundwater resources, to meet ever-increasing demands for public water supply and irrigation, especially in arid and semi-arid regions where low precipitation and high evapotranspiration rates are the main concerns (Okello, Tomasello, Greggio, Wambiji, & Antonellini, 2015).

Assessment of groundwater storage can be performed by applying the water balance method, which accounts the inflow-to and the outflow-from the aquifer (Hiscock & Bense, 2014). The groundwater balance method is useful to quantify the amount of groundwater that could be safely withdrawn. Groundwater balance is imperative to measure the safe yield of the aquifer system and to set its sustainable management and rational abstraction (Voudouris, Diamantopoulou, Giannatos, & Zannis, 2006). The safe yield is defined as the amount of water that can annually be abstracted without causing any undesired results (Todd, 1980). If abstraction exceeds the total annual recharge of groundwater (overdraft), the aquifer is no longer sustainable (Devlin & Sophocleous, 2005; Dewiest, 1991; Fetter, 2018; Freeze & Cherry, 1979).

Kumar (2012) indicated that the effects of climate change on surface water resources are widely recognised but not much is known about its effects on groundwater. The reasons are seen to be; it requires long historical time series that is not always available, also, the driving factors that cause such changes are yet unclear. Moreover, (Earman & Dettinger, 2011) have seen that the responses of groundwater systems to climate by adopting the sustained and frequent monitoring is seen as more decisive, recognising the impacts of climate change on groundwater would help groundwater decision-makers to seek for adaptative choices, including aquifers' recharge management and conjunctive programs. Beyond this, sustainable water resources management has to address groundwater vulnerabilities under climate change projections more

generally. Furthermore, (Mohammed Nanekely, Scholz, & Al-Faraj, 2016) have concluded that a generic platform has to be developed based on affected pillars, supporting the short and long-term regional and national strategies towards sustainable water systems, besides, a maintained groundwater management in semiarid conditions requires a solid framework development that to be built upon sustainability notions (M. Nanekely, Scholz, & Qarani Aziz, 2017).

Erbil province like other semiarid regions has been going under an intensive groundwater depletion so far, as revealed that the groundwater depletion has become a global water security threat (Famiglietti, 2014). This research deals with the estimation of groundwater balance in Erbil province in Iraq towards establishing a regulatory sustainable strategic framework of rational use and management of groundwater, which could potentially be adopted in arid and semi-arid climate regions.

2 MATERIALS AND METHODS

The groundwater storage balance is attributed to its recharge and discharge components, and can be defined as the water balance basic concept (Meyland, 2011; Scanlon et al., 2002), which is the volume of water entering a water system during a specific time period denoted as (inflow, I) subtracting the volume that leaves that water system as (outflow, O), which equals the change in the volume of water in the system (ΔS) Equation (1).

$$I - O = \pm \Delta S \quad (1)$$

The more precise equation is the following equation that had been applied in northern Iraq for some studied basins with adequate data for balance analysis (Stevanovic & Iurkiewicz, 2009):

$$P + Sf = R + E + Q + A \pm GWR \quad (2)$$

Where: P is precipitations, Sf signify surface flows to the basin, R is runoff and surface flow out from basin, E is evapotranspiration, Q denotes discharge of springs, A is groundwater pumping abstraction, and GWR denotes changes in groundwater reserves.

Since the study area is bounded by two rivers, the Greater Zab River to the north-southwest and the Lesser Zab River to the east-southeast (Figure 1), and based on official references both are sourcing from the outside of the studied area, and both are providing surface water and absorbing basin's groundwater, as

underneath flow directions are seeps toward both, therefore, the surface runoff of rivers are not considered into the calculations, except that runoff was being triggered from rainfalls.

2.1 Study area

Erbil is one of the provinces of the Iraqi Kurdistan region. Erbil city is the capital of the Kurdistan Region and the centre of Erbil province. The location of Erbil province is extending from latitude 35°23'55" to 36° 58' 21" N and longitude 43° 11'47" to 45° 09'53" E, that is located 382 km north of Baghdad, the capital of Iraq. It has a population of 2.113 million inhabitants in 2017 (KSRO, 2019). The Erbil border extends to Iran in the East and to Turkey in the north. The predominant plains in the south of the province are important parts of the agricultural production (KRG, 2019; KSRO, 2019).

According to the Köppen–Geiger climate classification, the northern part of Erbil province is of the Mediterranean semi-arid (CSa) climate class (Kottek, Grieser, Beck, Rudolf, & Rubel, 2006; Peel, Finlayson, & McMahon, 2007), which characterised by mild, and generally warm and temperate, with clear dry summers, whereas the mid and southern part is classified as (BSh) class, as a subtropical semi arid (Hot Steppe) climate (Rasul, Balzter, & Smith, 2015). The district is almost influenced by hot-summer Mediterranean climates, that is with long, extremely hot, sweltering summers, and with cold winters. Summer months are extremely dry, with negligible precipitation between June and September. Winters are rainy and partly cloudy, with January being the wettest month.

Erbil Province that covers an area of 15,089 km² (3.5% of Iraq) has been chosen as an example case study. The study area encounters: (a) Groundwater over-exploitation (Issa, 2018); (b) increasing in temperature and potential evapotranspiration rates and reducing in precipitation due to climate change (Fadhil, 2011; Lück, Farahat, & Hannouna, 2014; Stevanovic & Iurkiewicz, 2009); (c) lacking of solid and consistent application of groundwater artificial recharge systems (UNDP, 2011); (d) lacking of integrated land-use planning and rapid urban growth (Hameed, Fage, Qurtas, & Hashemi, 2015); (e) Absence or weakness of law of drilling of wells and enforcement of groundwater development regulations; and (f) shortage of financial provisions needed to implement and or rehabilitate relevant infrastructure

(Erbil Governorate, 2018; MoAWR-KRG, 2016; MOP-KRG, 2011; UNDP, 2011).

The average annual rainfall almost ranges between 200mm and 980mm. over the course of the year, the mean annual temperature of the study area ranges between 9.7°C and 22.3.0°C. The long-term mean annual potential evapotranspiration falls between 1295mm and 2145mm (Table 1). The study areas' elevations vary in ranging from less than 200masl from the far south of the province to approximately 3613masl in the far north (BirdLife International, 2019)(Figure1 and Table 1). The agricultural land is estimated to be 41% as arable land and 59% is non-arable land. An amount of 93% of agricultural crops depends on rainfall and only 7% of the land is being irrigated (Fadhil, 2011).

2.2 Meteorological data and time series analysis

Daily data of seventeen meteorological stations (MS) were downloaded and analysed for stations of altitude ranging from about 175 masl to as much as 2306 masl within and in close proximity to Erbil Province. Daily records of precipitation (P), minimum temperature (T_{min}) maximum temperature (T_{max}), mean air temperature (T_{mean}), solar radiation, wind speed, and relative humidity for 35 years from the water years (1979-1980) to (2013-2014) were made accessible by the National Centres for Environmental Prediction (NCEP, 2015) and Climate Forecast System Reanalysis (spatial resolution = 0.5° × 0.5°). Table 1 shows the coordinates and the altitudes of the meteorological stations and the location of these stations have been portrayed in Figure 1.

The Food and Agriculture Organization Penman-Monteith (FAO-PM) method (Allen, Pereira, Raes, & Smith, 1998) was used to determine the potential evapotranspiration (PET). This method has been commonly used worldwide in obtaining the reference crop evapotranspiration (ET_o) (Bogawski & Bednorz, 2014; Debnath, Adamala, & Raghuvanshi, 2015; Kwon & Choi, 2011; Sharifi & Dinpashoh, 2014; Tabari & Talaee, 2011; Vangelis, Tigkas, & Tsakiris, 2013). The FAO tool version 3.2 (FAO, 2012) was applied to obtain the PET. The Penman-Monteith (FAO-PM) method is given in Equation 3.

$$ET_o = \frac{0.408 \Delta (R_n - G) + \gamma \frac{900}{T + 273} u_2 (e_s - e_a)}{\Delta + \gamma (1 + 0.34 u_2)} \quad (3)$$

where ET_o is the reference evapotranspiration (mm/day); R_n is the net radiation at the crop surface (MJ/m²/day); G is

the soil heat flux density (MJ/m²/day); T is the mean daily air temperature at 2 m height (°C); u₂ is the wind speed at 2m height (m/s); e_s is the saturation vapour pressure (kPa); e_a is the actual vapour pressure (kPa); (e_s-e_a) are the saturation vapour pressure deficit (kPa); Δ is the slope vapour pressure curve (kPa/°C); and γ is the psychrometric constant (kPa/°C).

The calculated long-term minimum, maximum, and mean annual precipitation, temperature, and potential evapotranspiration are shown in Table 1. Figure 2 displays the long-term mean monthly precipitation (P), long-term mean monthly potential evapotranspiration (PET), and the long-term mean monthly deficit and surplus for the seventeen meteorological stations (MS). The northern and the mid parts (mountainous and plateaus lands) of the study area where (MS1 to MS13) are located, which are associated with high amount of precipitation from November up to the mid of March, whereas the southern part (plain area) of the study area where covered by (MS14 to MS17) is linked to high-temperature and less precipitation coupled with frequent drought episodes.

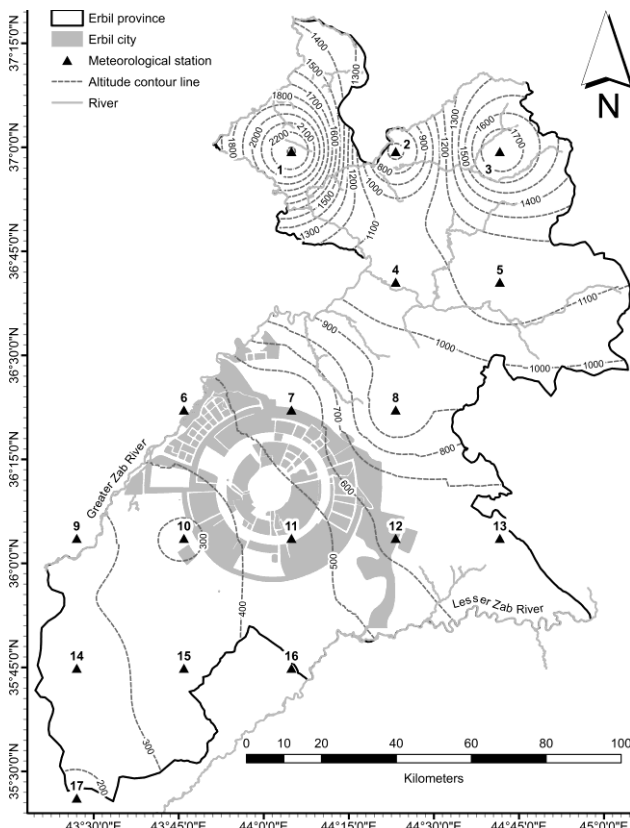


Figure 1: The study area

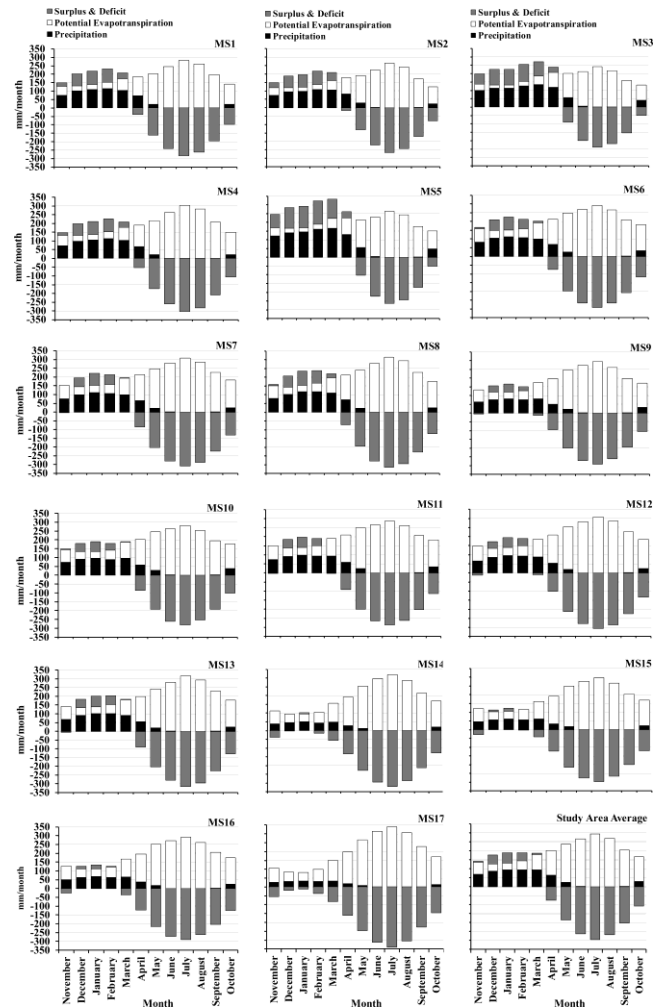


Figure 2: Box plot of long-term mean monthly precipitation and potential evapotranspiration over the period (1980-2014) for the 17stations.

Table 2 and Figure 3 show the average monthly areal precipitation (P) values and (PET) for all stations across the area. The value of (P) ranged between 0.06mm that observed in July and 94.7mm noticed in February with an average of 46.60 mm and standard deviation (S.Dev) of 41.02mm. Concerning the PET, the corresponding values are 36.18 mm observed in January, 293.97 mm noted in July with an average of 149.70mm and S.Dev. of 95.97mm. The months November to March are associated with surplus whereas deficit is linked to all other months. Figure 4 illustrates the long term mean monthly potential evapotranspiration, it depicts that the months of June, July, and August have been recognized as that vast amounts of evapotranspiration lose in their periods, in reverse with months of December, January, and February. Whereas Figure 5 demonstrates the long term mean annual potential evapotranspiration and mean annual precipitation of all stations along with

depicting the meteorological stations in different areas. As it is clear that the mountainous areas which covered by MS1-MS5 receive more precipitation joined with less evapotranspiration, in contrast with plain areas, which found that had less precipitation and lost an abundant amount of evapotranspiration.

Table 2: Long Term Mean monthly precipitation, mean monthly potential evapotranspiration and water status for the period (1980-2014).

Month	P (mm)	PET (mm)	Difference (PET-P) (mm)	Status
November	70.11	67.07	-3.04	Surplus
December	87.74	39.86	-47.88	Surplus
January	94.24	36.18	-58.06	Surplus
February	94.71	48.32	-46.39	Surplus
March	93.15	86.75	-6.40	Surplus
April	63.14	137.98	74.84	Deficit
May	25.29	211.18	185.89	Deficit
June	1.37	264.95	263.58	Deficit
July	0.06	293.97	293.91	Deficit
August	0.10	268.85	268.75	Deficit
September	1.16	203.76	202.60	Deficit
October	28.11	137.42	109.31	Deficit
Mean	46.60	149.69	103.09	Deficit
S.Dev.	41.02	95.97	135.37	
Min	0.06	36.18	-58.06	
Max	94.71	293.97	293.91	

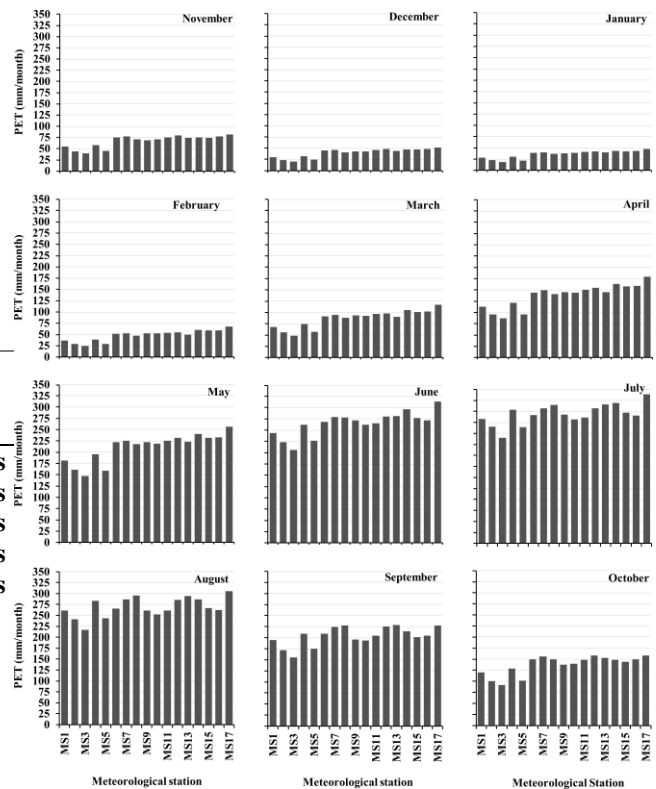


Figure 4: Long Term Mean Monthly Potential Evapotranspiration (LTMPET) of 17 stations

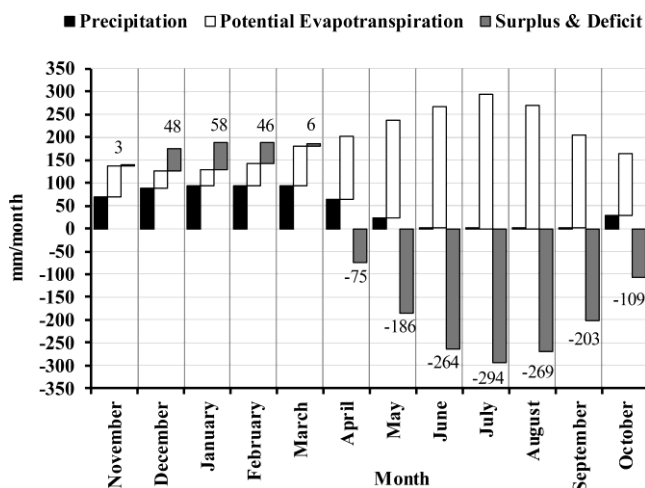


Figure 3: The average areal panned PET of the 17 stations: long-term mean monthly precipitation and potential evapotranspiration for the period (1980-2014).

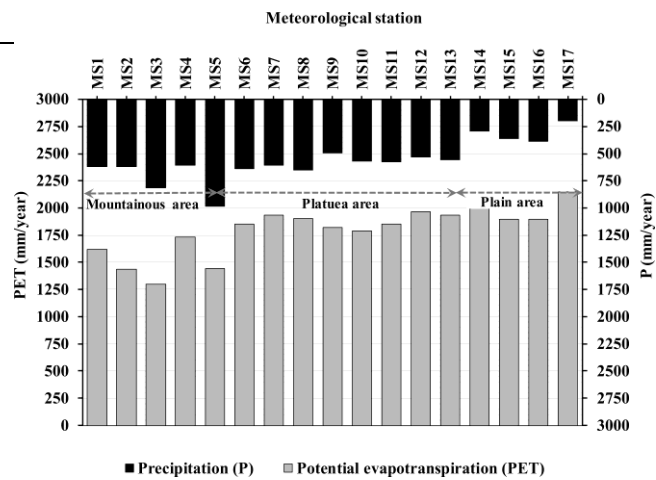


Figure 5: Long Term Mean Annual Potential Evapotranspiration (LTMAPET) and Mean Annual Precipitation (LTMAP) of 17 stations

Figure 6 suggested that considerably high PET values are associated with three consecutive years (1999, 2000, and 2001) just under 2000mm/year, whereas notably low PET values are linked to the years 1983 and 2013 that is a bit over 1600mm/year. A significant increase is detected of PET between 1992 of about 1663mm and 1999 of approximately 1995mm. The years between 1999 and 2005 shows a notable decline in PET values from 1995mm to 1818mm. Remarkable drop is observed between 2010 and 2013 as the PET

value dropped from about 1930mm in 2010 to nearly 1600mm. High PET values between 1925mm and almost 1950mm are also noticed in the years 2006, 2008, and 2010. As all, the trend line gives an indication that the studied area had been passing through steps up increments in evapotranspiration by almost 2.5mm/year, which has adverse impacts on water reserves in soil cover and sub-soil, besides, even the excessive water demands by crops.

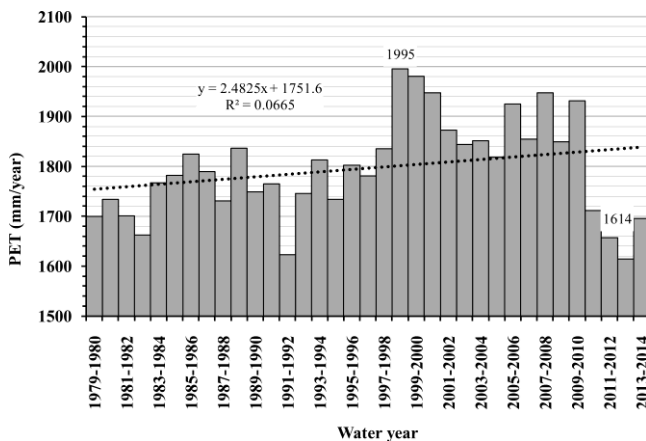


Figure 6: Average of the annual PET (APET) over the study area with trend line (1980-2014)

For assessing the climate class and water availability in the studied area, the Aridity Index (AI) is perceived to be needed and has been adopted. It is defined as a bioclimatic index, as it considers both physical phenomena (precipitation and evapotranspiration) and biological processes (plant transpiration). Moreover, the index represents one of the most relevant indicators for studying desertification processes (Colantoni et al., 2015; Hussien & Fayyadh, 2013). The Aridity Indices (AI) have been determined based on the gathered data, as it is a well-known method for quantifying the differences between rainfall contributions and water demand which, through the formula adopted by FAO¹, UNEP², and UNCCD³, represents a simple but powerful tool for scientific study, territorial observation and classification. The Aridity Index is a result of dividing the total annual precipitation (P) by the annual potential evapotranspiration (PET), Equation (4):

$$AI = \frac{P}{PET} \quad (4)$$

¹Food and Agriculture Organization (<http://www.fao.org/>).

²United Nations Environment Programme (<http://www.unep.org/>).

³United Nations Convention to Combat Desertification (<http://www.unccd.int/main.php>).

There are different classes of aridity, according to the classification of the Union Nation Environmental Program (Middleton & Thomas, 1992; UNEP, 1992), the (AI) values below 0.5 define the arid or semi-arid areas, whilst the values over 0.65 represent the humid and hyper-humid zones, as shown in the following table:

Table 3: Climate zone classification

Zone	Precipitation/ Evapotranspiration (P/ET)
Hyper-arid	<0.05
Arid	0.05–0.20
Semi-arid	0.20–0.50
Dry sub-humid	0.51–0.65
Moist sub-humid and humid	>0.65

In Table 4, the data of 35 hydrological years have been tabulated, the mean annual precipitation and the potential evapotranspiration, further, the annual, the decadal, and the long-term aridity indices and classifications corresponding to each one. The annual index analyses show that the area has mostly been being classed as semi-arid, except the years 1988 and 2013 were wet, both three consecutive years of (1999-2001) and (2007-2009) were subjected to intense drought periods, that is, the area was tending to change to be an arid zone, whereas based on the decadal index analysis, the years of the 2000s' were classed as arid period. The long-term (AI) was being (0.311), which limited the recharge of groundwater in the area, which caused moisture loss and contributed to drought condition in such semi-arid region, as a consequence, it reflects drought crisis that affecting negatively on the recharge of groundwater.

2.3 Assessing aquifer status using effective infiltration analysis

Effective infiltration (I_{eff}) is one of the basic hydrological parameters and the quantity of meteoric water per unit surface that annually infiltrates into the soil and recharging aquifers (Bonacci, 2001; Rossi & Donnini, 2018). Thereon, the effective infiltration approach considered as one of the techniques by which groundwater storage can be assessed and quantified. To analyse the groundwater reserves in this study area, data have been gathered from different sources; the secondary research data, which have been taken from studies that have been undertaken before (Hameed, 2013; Stevanovic & Iurkiewicz, 2009), and the data

that have been taken from official government departments (MoAWR-KRG, 2016), additionally, primary data were prepared represented as daily precipitation, and air temperature (NCEP, 2015) that have been relied by other studies (Dile & Srinivasan, 2014; Fuka et al., 2014), to find out mean monthly potential evapotranspiration for 17 stations across the area. Hydrological years defined over twelve consecutive months from 1st November of any year to 31st October of the following year that can be used in the estimation as long as the changes in groundwater storage. The wet season extends from November to April, whereas dry season is from May to October that mostly the monthly precipitations were not exceeded 100mm (Murray-Tortarolo, Jaramillo, Maass, Friedlingstein, & Sitch, 2017).

In this case, the effective infiltration (I_{eff}) have been adopted to quantify recharge from precipitation, that is the ratio of (infiltration depth/gross precipitation) for a certain time, and based on this definition, the ranges of (I_{eff}) coefficient is between 0 and 1. It is defined by the following analytical equations (5)(Bonacci, 2001):

$$I_{eff} = \frac{P_{eff}}{P_g} \times 100 \quad (5)$$

Where: I_{eff} is Effective precipitation; P_{eff} is effective precipitation; and P_g id gross precipitation

It is worth to mention, the effective infiltration approach has limitations and might leads to uncertainty, it can be noted as; if there was a high-intensity rainfall in a specific time, the ability of soil to capture the precipitation would be less than usual that leads to less effective precipitation values, whereas, if there were no rainfall in a certain time period, the value of effective precipitation would be infinite. Thus, the more time span considered, the more reliable the results would be getting. And therefore, Equation (6) has been employed to minimise errors.

Equation (6) has been used to estimate the values of long-term mean seasonal effective precipitation for the whole studied area along 35 hydrologic years.

$$I_{eff} = \frac{\sum_{i=1}^6 P_{eff}}{\sum_{i=1}^6 P_g} \quad (6)$$

Where (I_{eff}): the effective infiltration coefficient, (P_{eff}): the monthly effective precipitation, and (P_g): the gross precipitation that has fallen on the area in a specified time unit, (i): the seasonal six months period.

Therefore, the variation of groundwater reserves are determined mainly in terms of the effective precipitation by the effective infiltration of soil cover classes corresponding to aquifers (Figure 7 and Figure 8), considering the annual character of the outcomes, all values are in $10^6 \text{ m}^3/\text{year}$ (MCM/year).

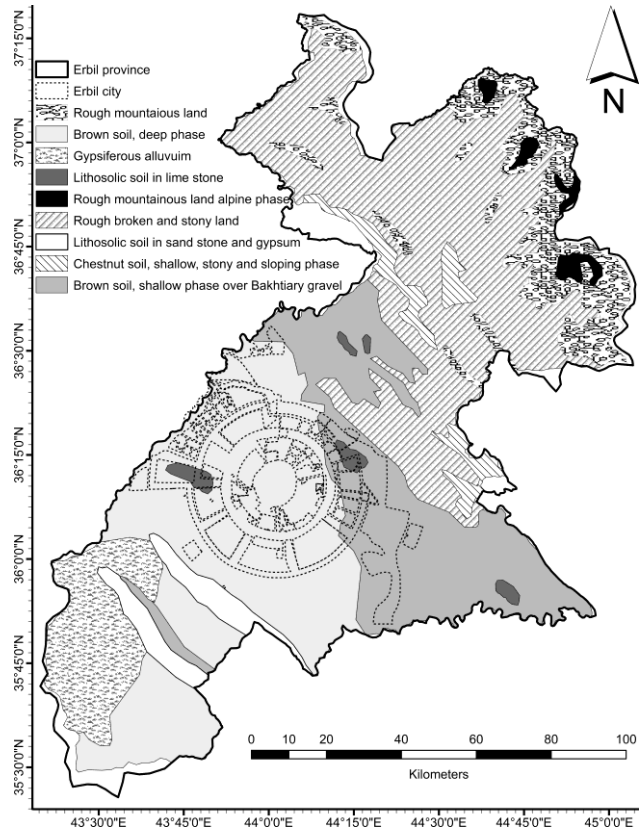


Figure 7: Soil cover types across the case study area

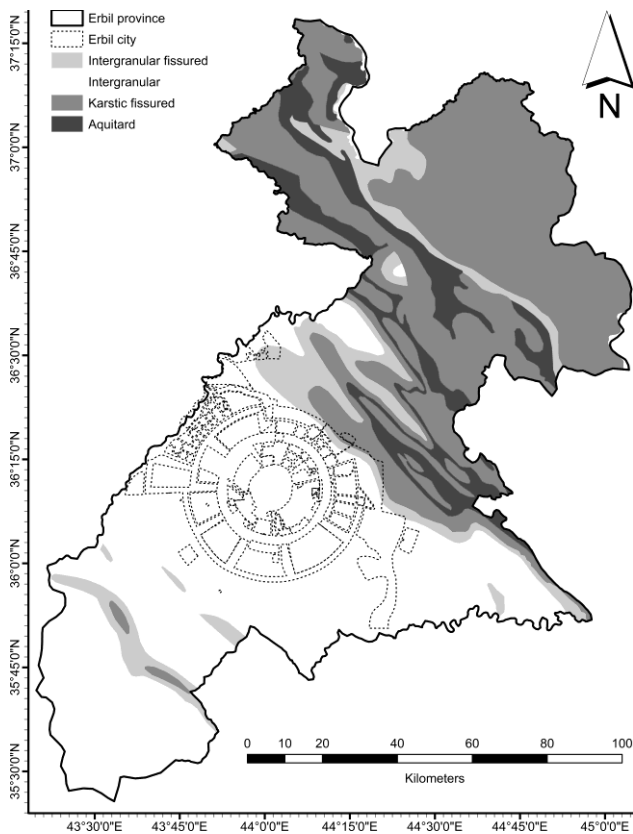


Figure 8: Aquifers types across the case study area

To grasp aquifers’ status over the studied area and for the targeted period, the groundwater recharge rates, volumes, and the permissible deemed times for water extraction from wells have been calculated, see Table (5), the percentage of effective infiltration (I_{eff}) has been employed to determine those aforementioned requirements. The effective precipitation (P_{eff}) values were basically determined on the (I_{eff}) ratios for various soil classes that covering the study area, corresponding to the long term gross seasonal precipitation (wet and dry) periods.

Different natural soil cover classes (Buringh, 1960; Hameed, 2013) have been sorted in table (5), the areas of each soil type were determined by utilising ArcMap GIS 10.7 software (ESRI, 2019) and its shapefiles, the values of (I_{eff}) for each class have officially been obtained from the Ministry of Agriculture and Water Resources , Kurdistan Region , Iraq (MoAWR-KRG, 2016).

Long-term precipitation (LTP) and the calculated long-term potential evapotranspiration (LTPET) by using the Equation (3) have been tabulated and compiled in a number of spreadsheets. The monthly precipitation and potential evapotranspiration for each year and for every particular meteorological station

(MS) have been categorised, then the long-term monthly precipitation (P) and potential evapotranspiration (PET) have been assorted for both seasons (wet and dry).

For each soil cover type, the averages of both climate parameters (P) and (PET) were determined from the meteorological stations’ data correspond to each soil class for both seasons (wet and dry), then the value of (I_{eff}) for each soil cover has been determined using Equations (5 and 6).

The aquifer formations and aquifer productivity maps helped to identify the corresponding soil classes to them (Figure 7, 8 and 9). First, the productivity of every aquifer has been set (Johnson, 1967; Lewis, Cheney, & O Dochartaigh, 2006; Payne & Woessner, 2010). Following, the recharge rates in (litre per seconds), and recharge volumes for all aquifers have also been determined in million cubic metres (MCM). Later, the aquifers' statuses were assessed on condition that seasonal effective precipitation (P_{eff}) to be greater or equal than the seasonal evapotranspiration.

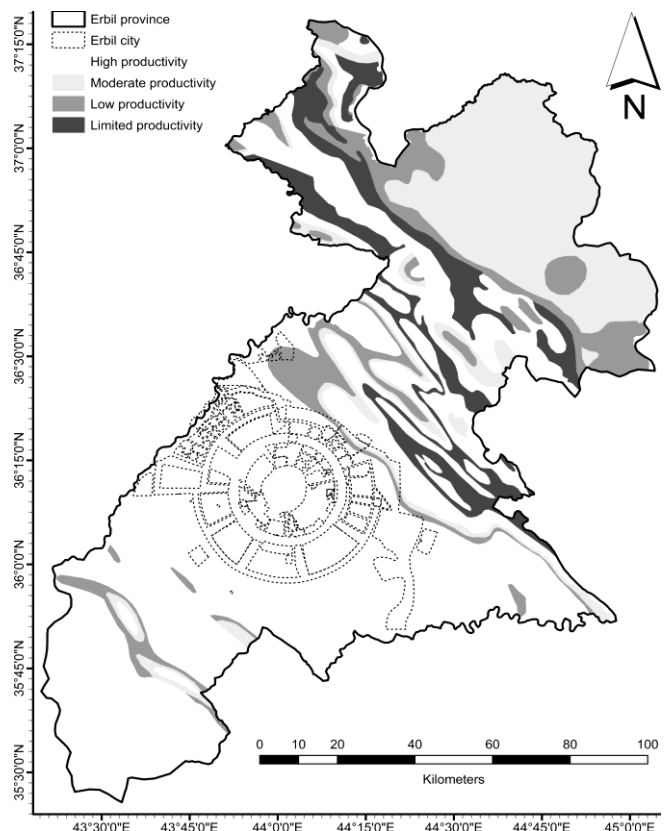


Figure 9: Productivity of aquifers across the case study area

To show the responses of rainfall infiltration over the studied area for the scoped time period, there is a need

to look for the relation between effective precipitation and time under the impacts of climate variables. The mean annual precipitation (MAP) data for every meteorological station have been added to tables based on the different soil covers and the number of meteorologic stations that cover the certain soil area. In the beginning, the average (MAP) was determined. Then, the effective precipitation (P_{eff}) for soil classes have been determined using Equation (6). Next, the average of all effective precipitations of the study area has been found verse every single water year. Lastly, the (MAP_{eff}) has been plotted as a line graph, see Figure (10).

2.4 Assessing aquifer status using Mass-Curve analysis

Stevanovic and Iurkiewicz (2009) have critically claimed that the application of simple water balance equation is only given to the yearly disparities between balance components and groundwater level temporal falls, which results from dry spells can lead to improper inferences and might be unnecessary constraints on groundwater utilisation at certain times. Therefore, the mass curve method is preferably seen to be used. For this purpose, data in Table (6) have been set, the same procedures have been followed as in table 5 except that the data entry was based on mean monthly precipitation to find (recharge rate and volumes) for every single year based on I_{eff} . approach as aforementioned before.

2.4.1 Groundwater storage change and extraction

To estimate the safe yield and aquifers' storage capacity, there a need to find annual storage volumes. The change of annual groundwater storage is determined by the following equation and Figure (11):

$$\Delta S_i = R_i - D_i - PET_i - Q_i \tag{7}$$

$i = 1, 2, 3, \dots, N = 35$ years

The inflow is represented as R_i and outflows are represented as: (D_i), (PET_i), and (Q_i)

Where: (R_i) represents as the recharge to the basin, (D_i) is the discharge from groundwater storage to rivers, (PET_i) is the evapotranspiration, and (Q_i) is the groundwater extraction for different purposes. It is worth to mention that, in the absence of human uses of groundwater the fluxes of (R_i , D_i , and PET_i) are defined as "native fluxes", while in the presence of groundwater extraction (Q_i) by human-induced factors, it represents as "actual fluxes", the extraction

flux (Q_i) is considered as the influential factor on the other fluxes (recharge, discharge, and the evapotranspiration), thus the safe yield relies on the actual flux (Heath, 2004; Loáiciga, 2017).

The actual operated well numbers and the average of water drafting volume have officially been compiled by (MoAWR-KRG, 2016), the extraction volumes have been determined for all aquifers. Further, the time-averaged extraction of groundwater, Q is given by Equation (8) below:

$$Q = \frac{\sum_{i=1}^N Q_i}{N} \tag{8}$$

Since lakes, wetlands and seas are not existing in this semiarid studied area, and in-counter to the most common case studies that the recharges from rivers and streams are contributing and replenishing the groundwater. This case study is characterised by groundwater under-drains toward both the Greater Zab and Lesser Zab rivers (Figure. 1), and that has not been considered because of unavailable quantitative data, but even so, the groundwater balance assessment have been carried out based on the other available data.

2.4.2 Cumulative change in groundwater storage

Turning to the cumulative groundwater storage, (Loáiciga, 2008) has stated that the cumulative annually change for long-time series in groundwater disclose the aquifer storage conditions during wet periods, and of nearly depleted aquifer storage during long droughts and abundant groundwater extraction. The cumulative annual variation in groundwater storage in year n is (V_n), see Equation 9, and (S_0) denotes the initial groundwater storage:

$$V_n = \sum_{i=1}^n \Delta S_i = S_n - S_0 = \sum_{i=1}^n (R_i - D_i - E_i - Q_i) \tag{9}$$

$1 \leq n \leq N$

Adopting the time-averaged groundwater balance, it can be expressed in the common equation below (Loáiciga, 2017). Where the storage change of groundwater in the year (i) is set by Equation (10) and Figure (12).

$$\Delta S_i = S_i - S_{i-1} \tag{10}$$

Storage and flux components herein represent the annual values of study area basin and represented in million cubic meters (MCM). Both the (S_{i-1}) and (S_i) are

signify the initial and last groundwater storage of (i) years, respectively.

Where: $i = 1, 2, \dots, N$. The N denotes the time span years of the typical period used for assessment.

2.4.3 Mass curve analysis

The safe yield has been estimated by a mass curve approach using the graphic method, it relies on the whole recorded datasets. The longer the dataset, the more reliable the estimates of safe yield and storage capacity, see figure (13). The approach relies on the net recharge, which is the product of subtracting both the annual discharge and the potential evapotranspiration from annual recharge. Therefore, the cumulative net recharge is the following:

$$CR_n = \sum_{i=1}^{35} (R_i + D_i + PET_i) \quad (11)$$

$i = 1, 2, 3, \dots, N$

Where, CR_n is cumulative net recharge.

The plotted vertical line distance, which intersecting tangents at high change points along the mass curve, and should be before periods of low recharge represents the estimated aquifer storage capacity. The least slope tangent line, which projects forward and intersects the mass curve is defined as the safe yield, and the slope of this tangential line is represented the annual groundwater volume that can be extracted. A tangent line that does not intersect the curve when projected forward with respect to time signifies extraction rates, which far exceed aquifer replenishment and is, accordingly, unsustainable for long term.

3 RESULTS AND DISCUSSION

Table 5 includes data on resulting-in the overall aquifer status along thirty-five years of the study area for the scope targeted period from 1980 to 2014, these were the base for the calculations of net recharges. However, the negative values of recharge rate and volumes do not have physical meanings, that is why negative results in the table were set to zero for all calculations. Only the (Rough mountainous land, alpine phase), and (Rough mountainous land) with their corresponded aquifers were safe along the studied time period. Whereas the other aquifers were not safe in most of the years for water drafting and provision. The area experienced a number of drought episodes. Also, the permissible well numbers that had to be operated has been calculated, that is based on

the ratio of recharge rate to the productivity of each aquifer.

It can be noticed as an average of the long term, that out of 15089 km² area, only 1425 km² was safe to draft groundwater, which is located in the mountainous areas on karst aquifers and also allows only 1203 wells to be operated, and not exceed a volume of just 76 MCM per annum. This indicates that as per that climate conditions of the targeted time period, there was a restricted volume of groundwater reserves that should utilise as per robust water resources planning.

Figure 10 portrays the relation between long term effective precipitation (LTPEff) verse the time series of the studied area. The correlation coefficient of ($r = -0.45$) shows a dispersed regression over time. That is a clear and simple line graph showing dramatically fluctuated downward and de-escalating trend of effective precipitation, further, there were significant sharp drops in the hydrologic years (1989, 1998, and 2008). It is notable that there was almost four folds difference between the wettest and the driest years 1988 and 1999 respectively. In recent years, its experienced recovery due to climate variability. The overall trend indicates that climate change had an influential impact on. It is worth mentioning, in cases that the decrease in received effective precipitation joined with excessive groundwater abstractions due to pressing needs, indeed that exacerbates the situation more.

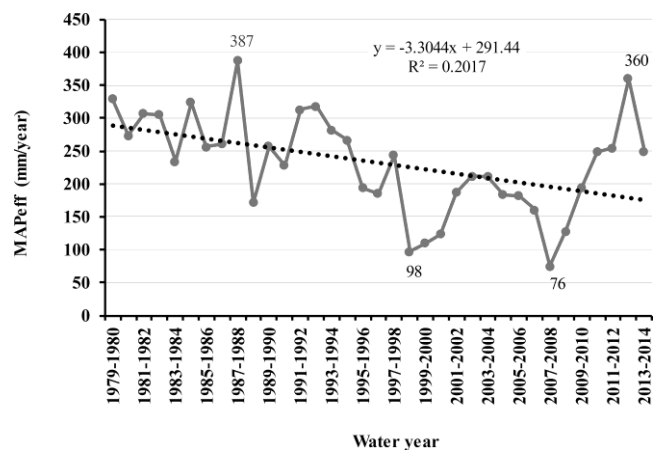


Figure 10: Long term annual effective precipitation and trendline

Table 6 is a sample calculation for the hydrologic year 2013-2014, the mean monthly precipitation (MMP), evapotranspiration (MMPET), and seasonal effective precipitation (P_{eff}) were the base data on resulting-in recharge volume, recharge rate, and aquifers' status. The results of recharge volume for each hydrologic

year were compiled in different tables to draw the Figures (11, 12, and 13). As like table 5, the resulted minus values were considered zero for all calculations. As the entry data were a monthly basis, the results have a bit different with table 5, the Karst fissured aquifers that corresponded to the (Rough mountainous land, alpine phase), (Rough mountainous land), and (Rough broken and stony land) were safe. Whereas, the other aquifers were not safe in most of the years for water drafting and provision.

It can be noticed as an average of the long term, that out of 15089 km² area, only 5618 km² was safe to utilise for groundwater drafting, which is located in the mountainous areas on Karst aquifers. Additionally, only 6283 wells were permissible to extract water in (2013-2014), but the long-term average was 5890 wells that to be operated, and not exceed drafting volume of just 256MCM per annum as an average of the long term. There are two result indications: First, the more time-scale basis shorter (monthly instead of annual), the more the reliable results are, and the second, solid and sustainable groundwater management is needed to conserve the storage volume per year.

Figure 11 depicts the fluxes: recharge, extraction, storage volumes, and the trend line over the time series from 1980 through 2014 in Erbil's aquifers. (noting that available extraction data were from 2004 to 2016). It is seen that there was significant inconsistency in recharge quantities (the grey line) along the studies period, noting that the area has been passed through a number of dry spells in 1999 and 2008, that the replenishment was almost non-existent. The coefficient of correlation ($r = -0.242$) is representing the dotted line of downward regression trend because of fluctuation in values.

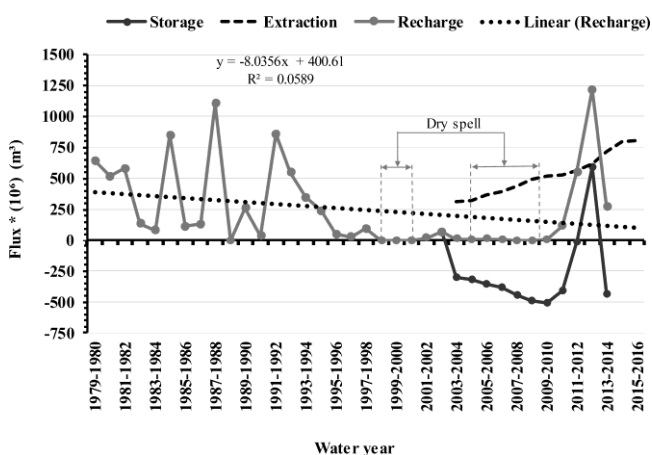


Figure 11:Line graphs of the annual fluxes along the study period

The dashed line graph represents groundwater extraction, it indicates a steady upward trend with time and along with the reported data of extraction. The groundwater extraction hit a maximum of 805 MCM, it shows a dramatic and remarkable difference with recharge volume that was being percolated of about 259 MCM as the average for long-term. Simply stating, it has been notoriously indicated that the over-abstraction of groundwater is referring to the lack of water availability, weak groundwater management, weakness in the power of the law, legislations do not match the real situation, and flawed legislation. Additionally, climate alterations caused extreme potential evapotranspiration.

As for the storage volume that is drawn in (black line), it displays the preceded storage that was being depleted as far 511 MCM in the hydrologic year 2009-2010, which signalises a risky notice for the water future resources in this semiarid area.

The most notable perception is that; along the period of recorded extraction data, the extraction line graph far exceeds the recharge line graph, truly it brings imperative attentions to decision-makers. It is seen that the estimated annual recharge can be set as a base for groundwater management either by restricting the amount of extraction or limiting the licensed time to operate wells. Besides, there are two considerable factors have to be bear in mind which are: setting a factorised margin to managed yields for future security and considering the predicted future climate alterations severity. Therefore, proper and frequent revisions are needed to be put-in-place for groundwater legislations and a flexible and dynamic groundwater management framework is needed.

Figure 12 describes the cumulative change in storage of groundwater in the study area per annum throughout the period 1980 to 2014, which was determined by Equation 9. The lower-bound assessment of the capacity of Erbil aquifer's storage can be simply found from (Figure 12), that been calculated by applying Equation 12 (Loáiciga, 2008). The variance between the minimum and the maximum of cumulative change in storage is equal to the lower bound of the aquifer storage. Therefore, the quantified lower-bound of the aquifer storage capacity is $C = 973 - (-1105) = 2078$ MCM as labelled in the figure below.

$$C = S_{\max} - S_{\min} = V_{\max} - V_{\min} = \sum_{i=1}^{n_{\max}} \Delta S_i - \sum_{i=1}^{n_{\min}} \Delta S_i \quad (12)$$

Where: C is the capacity of aquifers; V is groundwater storage volume; nis the time series length that inset at least one typical period and should be extended enough to present both aquifer storage statuses: the full as denoted by (S_{max}) and the depleted as denoted by (S_{min}).Based on the groundwater drafting patterns, and variability of regional climate, decades time span series might be decided as a requirement of result certainty. The longer time span period, the more result certainty is.

this will be based on both the climate alterations that pass through the region, and that will be passing in the future, in addition to, the geomorphology of the studied area. It is worth to mention, the power of Law is seen as a significant factor that restricting non-rational groundwater utilisation, that is, solid sustainable groundwater management is needed as a base for future planning.

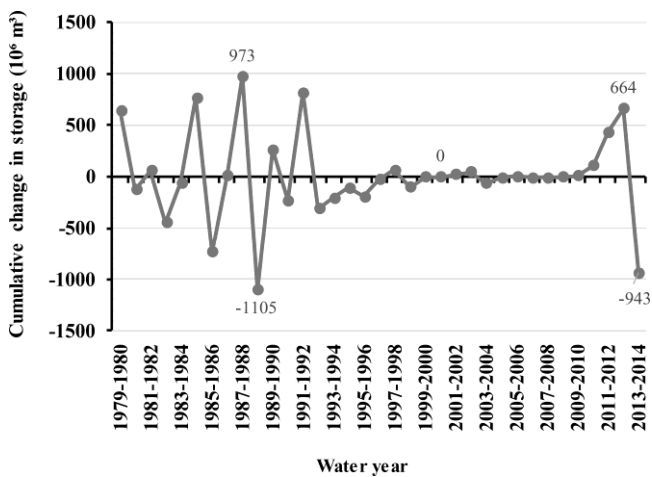


Figure 12: Cumulative change in groundwater storage for the Erbil aquifers for the period of 1980-2014

There has been dealt with the estimation of groundwater recharge for the different types of aquifers in Erbil basin. In order to assess the safe yield of these aquifers, the net recharge volumes have been adopted on. Figure (13) shows the analysis of the mass curve for the aquifers corresponding to the studied time period.

It can be seen that the time spanned period had been subjected to three dry episodes that affected negatively on groundwater reserves. The longer draught spell extended for several years, that is 1999 to 2008 that was corresponding to the great amounts of groundwater abstractions due to excessive demands, and the increased number of illegal water wells, which made the situation exacerbated more. Furthermore, the tangential line slope represents the safe yield that in this case counts to 125 MCM per year and corresponds to the lower-bound of aquifer storage estimation of 2078 MCM.

Attentions can be drawn for the decision-makers and water resources planners; they should consider the groundwater reserves as the last preference for water provisions in semiarid areas. The safe yield figures can be the crucial standard that cannot be surpassed,

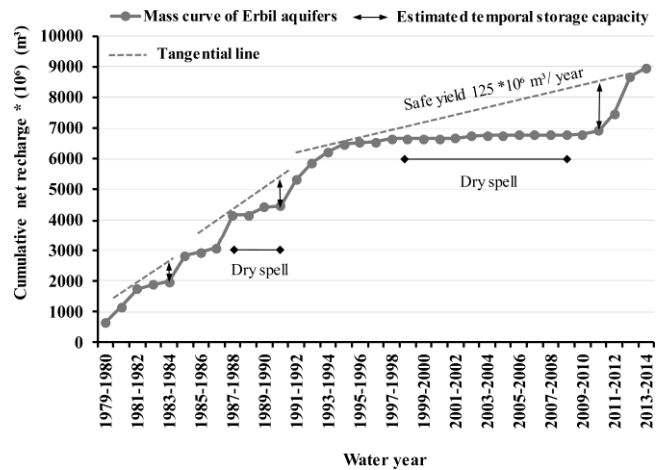


Figure 13: Mass curve of net recharge for the study area aquifers

4 CONCLUSION AND RECOMMENDATIONS

Results revealed that all assessed aquifers have been impaired by over-exploitation of groundwater. The amounts of recharge during dry seasons considerably exceeded the one during the wet seasons. The abstractions exceed both recharge and safe yield of the aquifer system.

To manage groundwater in a safe and sustained manner, researchers on semiarid areas should develop their studies on a long-time series spanned for several decades in order to get more reliable results, as these areas have been being subjected to unsteady, unpredictable, and unsettled climate alterations.

Thus, the development of a local groundwater database linked to regional databases is strongly recommended for sustainable management purposes. Despite uncertainties in predicting future climate alterations in semiarid areas, most researchers predict that the up-coming decades will be characterised by severe droughts. Thus, groundwater reserves must be maintained.

Groundwater over-exploitation and depletion (specifically in arid and semiarid areas) leads to lower

groundwater levels, storage reduction, and sea water intrusion in coastal areas, quality degradation and land subsidence. Therefore, stakeholders such as the government, communities, civil society organisations, and law-makers need to agree on sustainable plans for the future.

There is a need for identifying the most threatened groundwater zones for decision-makers and local authorities to implement their strategies for long-term sustainable use of groundwater. Therefore, mapping of recharge areas and groundwater protection zones are crucial and should be considered as an integral part of long-term integrated watershed management, particularly for the sustainable management of groundwater resources.

Water in shared aquifers should be regarded as common to all parties. Active and enforceable management of both surface water and groundwater is needed to prevent groundwater depletion by harnessing surface water to replenish it.

Moreover, a technical framework is required to be developed to sustainably manage the water resources in an integrated manner through focusing on a number of issues: Legislation reform, government authority power, effective and efficient real-time data monitoring system, water quality, supply-demand gaps, research support centres, climate change, UNSDGs indicators, water policy, and also the collaborative action should be well considered in the developing of technical framework.

Acknowledgments

Some data has been provided by the General Directorate of Water Resources, Ministry of Agriculture and Water Resources, KRG, Iraq and the affiliated departments, both groundwater and irrigation directorates.

Also, kind gratitude to the academic, Prof. Zoran Stevanović, from The University of Belgrade - Faculty of Mining & Geology (FMG), Department of Hydrogeology, Serbia.

This research did not receive any specific grant from funding agencies in the public, commercial, or not-for-profit sectors.

5 REFERENCES

Allen, R. G., Pereira, L. S., Raes, D., & Smith, M. (1998). Crop evapotranspiration-Guidelines for computing crop water requirements-FAO Irrigation and drainage

paper 56. In *FAO* (Vol. 300). Rome, Italy.

- BirdLife International. (2019). Important Bird Areas factsheet: Halgurd Mountain. Retrieved November 9, 2019, from <http://datazone.birdlife.org/>
- Bogawski, P., & Bednorz, E. (2014). Comparison and Validation of Selected Evapotranspiration Models for Conditions in Poland (Central Europe). *Water Resources Management*, 28(14), 5021–5038. <https://doi.org/10.1007/s11269-014-0787-8>
- Bonacci, O. (2001). Monthly and annual effective infiltration coefficients in Dinaric karst: example of the Gradole karst spring catchment. *Hydrological Sciences Journal*, 46(2), 287–299. <https://doi.org/10.1080/02626660109492822>
- Buringh, P. (1960). *Soils and soil conditions in Iraq*. Retrieved from http://library.wur.nl/isric/fulltext/isricu_i00000648_001.pdf
- Colantoni, A., Delfanti, L. M. P., Cossio, F., Baciotti, B., Salvati, L., Perini, L., & Lord, R. (2015). Soil aridity under climate change and implications for agriculture in Italy. *Applied Mathematical Sciences*, 9(49–52), 2467–2475. <https://doi.org/10.12988/ams.2015.52112>
- Debnath, S., Adamala, S., & Raghuvanshi, N. S. (2015). Sensitivity Analysis of FAO-56 Penman-Monteith Method for Different Agro-ecological Regions of India. *Environmental Processes*, 2(4), 689–704. <https://doi.org/10.1007/s40710-015-0107-1>
- Devlin, J. F., & Sophocleous, M. (2005). The persistence of the water budget myth and its relationship to sustainability. *Hydrogeology Journal*, 13(4), 549–554. <https://doi.org/10.1007/s10040-004-0354-0>
- Dewiest, S. N. D. and R. J. M. (1991). *Hydrogeology*. New York: Krieger Pub Co.
- Dile, Y. T., & Srinivasan, R. (2014). Evaluation of CFSR climate data for hydrologic prediction in data-scarce watersheds: an application in the Blue Nile River Basin. *JAWRA Journal of the American Water Resources Association*, 50(5), 1226–1241. <https://doi.org/10.1111/jawr.12182>
- Earman, S., & Dettinger, M. (2011). Potential impacts of climate change on groundwater resources – a global review. *Journal of Water and Climate Change*, 2(4), 213–229. <https://doi.org/10.2166/wcc.2011.034>
- Erbil Governorate. (2018). Erbil geography. Retrieved August 10, 2018, from <http://www.hawlergov.org/en/page.php?id=1329120973>
- ESRI. (2019). *ArcGIS for Desktop 10.7*. Environmental Systems Research Institute.
- Fadhil, A. M. (2011). Drought mapping using Geoinformation technology for some sites in the Iraqi Kurdistan region. *International Journal of Digital Earth*, 4(3), 239–257. <https://doi.org/10.1080/17538947.2010.489971>
- Famiglietti, J. S. (2014). The global groundwater crisis. *Nature Climate Change*, 4(11), 945–948. <https://doi.org/10.1038/nclimate2425>
- FAO. (2012). *ETo Calculator: Land & Water, Food and*

- Agriculture Organization of the United Nations. Retrieved from <http://www.fao.org/land-water/databases-and-software/eto-calculator/en/>
- Fetter, C. W. (2018). *Applied Hydrogeology* (4th ed.). New Jersey: Waveland Press.
- Freeze, R. A., & Cherry, J. A. (1979). *Groundwater*. New Jersey: Prentice-Hall, Inc.
- Fuka, D. R., Walter, M. T., MacAlister, C., Degaetano, A. T., Steenhuis, T. S., & Easton, Z. M. (2014). Using the Climate Forecast System Reanalysis as weather input data for watershed models. *Hydrological Processes*, 28(22), 5613–5623. <https://doi.org/10.1002/hyp.10073>
- Hameed, H. M. (2013). *Water harvesting in Erbil Governorate, Kurdistan region, Iraq Detection of suitable sites using Geographic Information System and Remote Sensing*. Lund University.
- Hameed, H. M., Faqe, G. R., Qurtas, S. S., & Hashemi, H. (2015). Impact of Urban Growth on Groundwater Levels using Remote Sensing - Case Study: Erbil City, Kurdistan Region of Iraq. *Journal of Natural Sciences Research*, 5(18), 72–85. Retrieved from www.iiste.org
- Heath, R. C. (2004). *Basic Ground-Water Hydrology. Water-Supply paper 2220*. Retrieved from <http://www.usgs.gov/>
- Hiscock, K. M., & Bense, V. F. (2014). *Hydrogeology Principles and Practice* (2nd ed.). Oxford: John Wiley & Sons Ltd.
- Hussien, B. M., & Fayyadh, A. S. (2013). Impact of intense exploitation on the groundwater balance and flow within Mullusi aquifer (arid zone, west Iraq). *Arabian Journal of Geosciences*, 6(7), 2461–2482. <https://doi.org/10.1007/s12517-011-0513-2>
- Issa, H. M. (2018). Long-term Evaluation of Temporal Variation in Groundwater Physicochemical Quality: A Case Study of Erbil City, Iraq (2003 – 2015). *Eurasian Journal of Science & Engineering*, 4(1), 32–48. <https://doi.org/10.23918/eajse.v4i1sip32>
- Johnson, A. I. (1967). Specific Yield Compilation of Specific Yields for Various Materials-- Hydrologic properties of earth materials. In *Geological survey water-supply paper 1662-D*. Retrieved from <https://pubs.usgs.gov/wsp/1662d/report.pdf>
- Kottek, M., Grieser, J., Beck, C., Rudolf, B., & Rubel, F. (2006). World Map of the Köppen-Geiger climate classification updated. *Meteorologische Zeitschrift*, 15(3), 259–263. <https://doi.org/10.1127/0941-2948/2006/0130>
- KRG. (2019). Kurdistan's geography and climate. Retrieved May 20, 2019, from <https://dfr.gov.krd/p/p.aspx?p=293&l=12&r=367>
- KSRO. (2019). Map of area of Kurdistan Region & its Governorates. Retrieved May 27, 2019, from <http://www.krso.net/Default.aspx?page=article&id=1142&l=1>
- Kumar, C. P. (2012). Assessing the impact of climate change on groundwater resources. *India Water Week 2012 – Water, Energy and Food Security: Call for Solutions*, 1–13. New Delhi: India Water Week 2012.
- Kwon, H., & Choi, M. (2011). Error assessment of climate variables for FAO-56 reference evapotranspiration. *Meteorology and Atmospheric Physics*, 112(1–2), 81–90. <https://doi.org/10.1007/s00703-011-0132-1>
- Lewis, M., Cheney, C. S., & O Dochartaigh, B. E. (2006). Guide to Permeability Indices. In *British Geological Survey*. Retrieved from <http://nora.nerc.ac.uk/id/eprint/7457/1/CR06160N.pdf>
- Loáiciga, H. A. (2008). Aquifer storage capacity and maximum annual yield from long-term aquifer fluxes. *Hydrogeology Journal*, 16(2), 399–403. <https://doi.org/10.1007/s10040-007-0270-1>
- Loáiciga, H. A. (2017). The safe yield and climatic variability: implications for groundwater management. *Groundwater*, 55(3), 334–345.
- Lück, A. H., Farahat, L., & Hannouna, M. (2014). *Integrated Drought Risk Management – DRM (National Framework for Iraq)*. Retrieved from <http://unesdoc.unesco.org/images/0022/002283/228343E.pdf>
- Meyland, S. J. (2011). Examining safe yield and sustainable yield for groundwater supplies and moving to managed yield as water resource limits become a reality. *WIT Transactions on Ecology and the Environment*, 145, 813–823. <https://doi.org/10.2495/WRM110731>
- Middleton, N., & Thomas, D. (1992). World atlas of desertification. *Edward Arnold, London*, 15–45.
- MoAWR-KRG. (2016). *Internal Report, Groundwater Data for Kurdistan Region*. Erbil, Kurdistan Region, Iraq.
- MOP-KRG. (2011). *Regional Development Strategy for Kurdistan Region 2012-2016*. Retrieved from http://www.mop.krg.org/resources/StrategicPlan/PDF/Regional_Development_Strategy_for_Kurdistan_Region_2013-2017.pdf
- Murray-Tortarolo, G., Jaramillo, V. J., Maass, M., Friedlingstein, P., & Sitch, S. (2017). The decreasing range between dry- and wet-season precipitation over land and its effect on vegetation primary productivity. *PLoS ONE*, 12(12), 1–11. <https://doi.org/10.1371/journal.pone.0190304>
- Nanekely, M., Scholz, M., & Qarani Aziz, S. (2017). Towards sustainable management of groundwater: A case study of semi- arid area, Iraqi Kurdistan region. *European Water*, 57, 451–457. Retrieved from http://www.ewra.net/ew/pdf/EW_2017_57_64.pdf
- Nanekely, Mohammed, Scholz, M., & Al-Faraj, F. (2016). Strategic Framework for Sustainable Management of Drainage Systems in Semi-Arid Cities: An Iraqi Case Study. *Water*, 8(9), 406. <https://doi.org/10.3390/w8090406>
- NCEP. (2015). Global Weather Data for SWAT. Retrieved April 14, 2015, from Climate Forecast System Reanalysis (CFSR) website: <https://globalweather.tamu.edu/>
- Njamnsi, Y. N., & Mbue, I. N. (2009). Estimation for

- Groundwater Balance Based on Recharge and Discharge: a Tool for Sustainable Groundwater Management, Zhongmu County Alluvial Plain Aquifer, Henan Province, China. *Journal of American Science*, 5(2), 83–90.
- Okello, C., Tomasello, B., Greggio, N., Wambiji, N., & Antonellini, M. (2015). Impact of Population Growth and Climate Change on the Freshwater Resources of Lamu Island, Kenya. *Water*, 7(12), 1264–1290. <https://doi.org/10.3390/w7031264>
- Payne, S. M., & Woessner, W. W. (2010). An aquifer classification system and geographical information system-based analysis tool for watershed managers in the Western U.S. *Journal of the American Water Resources Association*, 46(5), 1003–1023. <https://doi.org/10.1111/j.1752-1688.2010.00472.x>
- Peel, M. C., Finlayson, B. L., & McMahon, T. A. (2007). Updated world map of the Köppen-Geiger climate classification. *Hydrology and Earth System Sciences*, 11(5), 1633–1644. <https://doi.org/10.5194/hess-11-1633-2007>
- Rasul, A., Balzter, H., & Smith, C. (2015). Spatial variation of the daytime Surface Urban Cool Island during the dry season in Erbil, Iraqi Kurdistan, from Landsat 8. *Urban Climate*, 14, 176–186. <https://doi.org/10.1016/j.uclim.2015.09.001>
- Rossi, M., & Donnini, M. (2018). Estimation of regional scale effective infiltration using an open source hydrogeological balance model and free/open data. *Environmental Modelling and Software*, 104, 153–170. <https://doi.org/10.1016/j.envsoft.2018.03.005>
- Scanlon, B. R., Healy, R. W., & Cook, P. G. (2002). Choosing appropriate technique for quantifying groundwater recharge. *Hydrogeology Journal*, 10, 18–39. <https://doi.org/10.1007/s10040-0010176-2>
- Sharifi, A., & Dinpashoh, Y. (2014). Sensitivity Analysis of the Penman-Monteith reference Crop Evapotranspiration to Climatic Variables in Iran. *Water Resources Management*, 28(15), 5465–5476. <https://doi.org/10.1007/s11269-014-0813-x>
- Stevanovic, Z., & Iurkiewicz, A. (2009). Groundwater management in northern Iraq. *Hydrogeology Journal*, 17(2), 367–378. <https://doi.org/10.1007/s10040-008-0331-0>
- Tabari, H., & Talaee, P. H. (2011). Local Calibration of the Hargreaves and Priestley-Taylor Equations for Estimating Reference Evapotranspiration in Arid and Cold Climates of Iran Based on the Penman-Monteith Model. *Journal of Hydrologic Engineering*, 16(10), 837–845. [https://doi.org/10.1061/\(ASCE\)HE.1943-5584.0000366](https://doi.org/10.1061/(ASCE)HE.1943-5584.0000366)
- Todd, D. K. (1980). *Groundwater Hydrology* (2nd ed.). New York: John Wiley Sons. Inc.
- UNDP. (2011). *Drought Impact Assessment, Recovery and Mitigation Framework and Regional Project Design in Kurdistan Region (KR)*. Retrieved from <https://www.undp.org/content/dam/rbas/report/Drought.pdf>
- UNEP. (1992). *Status of Desertification and Implementation of the United Nations Plan of Action to Combat Desertification: Report of the Executive Director: Governing Council, Third Special Session, Nairobi, 3-5 February, 1992*. United Nations Environment Programme.
- Vangelis, H., Tigkas, D., & Tsakiris, G. (2013). The effect of PET method on Reconnaissance Drought Index (RDI) calculation. *Journal of Arid Environments*, 88, 130–140. <https://doi.org/10.1016/j.jaridenv.2012.07.020>
- Voudouris, K., Diamantopoulou, P., Giannatos, G., & Zannis, P. (2006). Groundwater recharge via deep boreholes in the Patras Industrial Area aquifer system (NW Peloponnesus, Greece). *Bulletin of Engineering Geology and the Environment*, 65(3), 297–308. <https://doi.org/10.1007/s10064-005-0036-8>

TABLE 1: LONGTERM MINIMUM, MAXIMUM AND MEAN ANNUAL PRECIPITATION, TEMPERATURE AND POTENTIAL EVAPOTRANSPIRATION

Meteorology station	Coordinates (Decimal degree)			Long-term mean annual precipitation(mm)			Long-term mean annual temperature(°C)			Long-term mean annual potential evapotranspiration(mm)		
	Longitude	Latitude	Altitude(masl)	Minimum	Maximum	Mean	Minimum	Maximum	Mean	Minimum	Maximum	Mean
1	44.0625	36.9991	2306	237.5	1372.3	621.6	11.6	15.6	13.8	1430.7	1816.6	1612.7
2	44.3750	36.9991	682	241.5	1063.2	615.7	9.4	13.6	11.7	1251.0	1587.7	1434.8
3	44.6875	36.9991	1783	313.9	1378.5	814.2	7.4	12.1	9.7	1097.8	1442.8	1295.0
4	44.3750	36.6869	1053	213.2	1150.1	607.9	13.0	17.6	15.5	1543.8	1948.3	1736.5
5	44.6875	36.6869	1154	370.4	1625.3	980.9	9.4	13.7	11.8	1238.4	1602.7	1440.2
6	43.7500	36.3747	401	191.8	1126.9	637.4	18.6	22.4	20.6	1628.9	2072.8	1850.7
7	44.0625	36.3747	507	182.9	1136.6	605.4	17.9	21.7	19.9	1582.7	2192.1	1937.2
8	44.3750	36.3747	977	189.0	1551.9	652.4	16.0	19.9	18.1	1487.8	2176.9	1905.7
9	43.4375	36.0624	261	100.8	928.8	492.6	18.9	22.6	20.9	1653.0	2017.4	1823.7
10	43.7500	36.0624	278	130.1	1070.4	570.2	18.5	22.3	20.6	1619.3	1962.0	1789.1
11	44.0625	36.0624	439	134.9	985.2	575.2	18.2	21.9	20.1	1656.3	2051.0	1851.9
12	44.3750	36.0624	605	128.0	1005.4	533.6	17.8	21.6	19.9	1573.6	2225.3	1965.1
13	44.6875	36.0624	648	145.1	1022.0	552.9	16.0	20.0	18.4	1579.5	2204.4	1936.6
14	43.4375	35.7502	252	44.5	526.5	294.4	19.6	23.2	21.6	1835.7	2200.5	1998.9
15	43.7500	35.7502	306	55.4	666.7	360.4	19.2	22.9	21.2	1747.1	2075.1	1898.3
16	44.0625	35.7502	483	63.2	720.5	389.6	19.1	22.8	21.1	1746.8	2080.9	1897.9
17	43.4375	35.4380	175	31.5	392.2	201.5	20.4	24.0	22.3	1986.1	2347.1	2145.1

TABLE 4: ANNUAL, DECADAL, AND LONG-TERM ARIDITY INDEX

Water year	MAP	MAPET	Annual aridity index	10-year aridity index	35-year aridity index	Annual zone class	Decadal zone class	Long-term 35-year zone class
1979-1980	850	1700	0.500	0.402	0.311	Semi-arid	Semi-arid	Semi-arid
1980-1981	668	1734	0.385	0.402	0.311	Semi-arid	Semi-arid	Semi-arid
1981-1982	743	1701	0.437	0.402	0.311	Semi-arid	Semi-arid	Semi-arid
1982-1983	755	1663	0.454	0.402	0.311	Semi-arid	Semi-arid	Semi-arid
1983-1984	595	1767	0.337	0.402	0.311	Semi-arid	Semi-arid	Semi-arid
1984-1985	793	1782	0.445	0.402	0.311	Semi-arid	Semi-arid	Semi-arid
1985-1986	621	1825	0.340	0.402	0.311	Semi-arid	Semi-arid	Semi-arid
1986-1987	659	1789	0.368	0.402	0.311	Semi-arid	Semi-arid	Semi-arid
1987-1988	924	1731	0.534	0.402	0.311	Dry sub-humid	Semi-arid	Semi-arid
1988-1989	434	1837	0.236	0.402	0.311	Semi-arid	Semi-arid	Semi-arid
1989-1990	602	1749	0.344	0.325	0.311	Semi-arid	Semi-arid	Semi-arid
1990-1991	580	1765	0.329	0.325	0.311	Semi-arid	Semi-arid	Semi-arid
1991-1992	751	1623	0.463	0.325	0.311	Semi-arid	Semi-arid	Semi-arid
1992-1993	757	1746	0.434	0.325	0.311	Semi-arid	Semi-arid	Semi-arid
1993-1994	670	1813	0.370	0.325	0.311	Semi-arid	Semi-arid	Semi-arid
1994-1995	639	1734	0.369	0.325	0.311	Semi-arid	Semi-arid	Semi-arid
1995-1996	473	1802	0.263	0.325	0.311	Semi-arid	Semi-arid	Semi-arid
1996-1997	450	1781	0.253	0.325	0.311	Semi-arid	Semi-arid	Semi-arid
1997-1998	648	1835	0.353	0.325	0.311	Semi-arid	Semi-arid	Semi-arid
1998-1999	229	1995	0.115	0.325	0.311	Arid	Semi-arid	Semi-arid
1999-2000	254	1980	0.128	0.197	0.311	Arid	Arid	Semi-arid
2000-2001	315	1947	0.162	0.197	0.311	Arid	Arid	Semi-arid
2001-2002	433	1873	0.231	0.197	0.311	Semi-arid	Arid	Semi-arid
2002-2003	507	1843	0.275	0.197	0.311	Semi-arid	Arid	Semi-arid
2003-2004	505	1851	0.273	0.197	0.311	Semi-arid	Arid	Semi-arid
2004-2005	450	1818	0.248	0.197	0.311	Semi-arid	Arid	Semi-arid
2005-2006	434	1925	0.225	0.197	0.311	Semi-arid	Arid	Semi-arid
2006-2007	367	1855	0.198	0.197	0.311	Arid	Arid	Semi-arid
2007-2008	163	1947	0.084	0.197	0.311	Arid	Arid	Semi-arid
2008-2009	300	1849	0.162	0.197	0.311	Arid	Arid	Semi-arid
2009-2010	466	1931	0.241	0.349	0.311	Semi-arid	Semi-arid	Semi-arid
2010-2011	563	1712	0.329	0.349	0.311	Semi-arid	Semi-arid	Semi-arid
2011-2012	541	1657	0.327	0.349	0.311	Semi-arid	Semi-arid	Semi-arid
2012-2013	829	1614	0.514	0.349	0.311	Dry sub-humid	Semi-arid	Semi-arid
2013-2014	602	1696	0.355	0.349	0.311	Semi-arid	Semi-arid	Semi-arid

TABLE5: ESTIMATED RECHARGE VOLUME, AQUIFERS’ STATUS,AND PERMISSIBLE WELL NUMBERS FOR THE AVERAGE LONG TERM 35 WATER YEARS

Cover soil		Estimated annual I_{eff} (%)	Precipitation					Aquifer			LTSPMET (mm)		Recharge rate (l.sec ⁻¹)			Recharge volume x 10 ⁶ (m ³ /year)			Aquifer status	Estimated permissible well number
Soil type	Area (Km ²)		LTSPM (mm)		P_{eff} (mm)			Formation	Productivity rating	Productivity (l.sec ⁻¹)	W.S.		D.S.			Total				
			W.S.	D.S.	W.S.	D.S.	Total				W.S.	D.S.	W.S.	D.S.	Total	W.S.	D.S.	Total		
A	139	35	542	53	190	18	208	intergranular	High	12	435	1440	0	0	0	0	0	0	Un-safe	0
B	1052	15	420	49	63	7	70	intergranular	High	12	465	1414	0	0	0	0	0	0	Un-safe	0
C	4059	20	449	50	90	10	100	intergranular	Moderate	10	471	1430	0	0	0	0	0	0	Un-safe	0
D	4193	50	603	62	301	31	332	karstic fissured	Low	1	363	1333	0	0	0	0	0	0	Un-Safe	0
E	149	60	712	92	427	55	482	karstic fissured	Low to moderate	2	261	1129	785	0	785	25	0	25	Safe	392
F	1276	55	646	69	355	38	393	karstic fissured	Low to moderate	2	315	1256	1622	0	1622	51	0	51	Safe	811
G	1131	25	372	44	93	11	104	intergranular	Moderate	10	481	1451	0	0	0	0	0	0	Un-safe	0
H	420	30	635	63	191	19	210	Aquitard	Ver low	0.1	373	1382	0	0	0	0	0	0	Un-safe	0
I	2670	35	538	50	188	18	206	intergranular	Moderate	10	437	1453	0	0	0	0	0	0	Un-safe	0
15089											2407					76			1203	

I_{eff} :Effective infiltration

LTSPM: Long term seasonal precipitation

P_{eff} : Effective precipitation

LTSPMET: Long term seasonal mean potential evapotranspiration

W.S.: Wet season (November-April)

D.S.: Dry season (May-October)

A: Lithosolic soil in lime stone

B: Gypsiferous alluvium

C: Brown soil, deep phase

D: Rough broken and stony land

E: Rough mountainous land, alpine phase

F: Rough mountainous land

G: Lithosolic soils in sand stone and gypsum

H: Chestnut soil, shallow, stony and sloping phases

I: Brown soils, medium and shallow phase over Bakhtiary gravel

TABLE 6: A SAMPLE CALCULATION TABLE FOR ESTIMATED RECHARGE VOLUME, AQUIFERS' STATUS, AND PERMISSIBLE WELL NUMBERS FOR THE WATER YEAR (2013-2014)

Cover soil		Estimated annual I _{eff} (%)	Precipitation					Aquifer			LTSM PET (mm)		Recharge rate (l.sec ⁻¹)			Recharge volume x 10 ⁶ (m ³ /year)			Aquifer status	Estimated permissible well number
Soil type	Area (Km ²)		LTSM P (mm)		P _{eff} (mm)			Formation	Productivity rating	Productivity (l.sec ⁻¹)	LTSM PET (mm)		Recharge rate (l.sec ⁻¹)			Recharge volume x 10 ⁶ (m ³ /year)				
			W.S.	D.S.	W.S.	D.S.	Total				W.S.	D.S.	W.S.	D.S.	Total	W.S.	D.S.	Total		
A	139	35	693	18	243	6	249	Intergranular fissured	High	12	391	1317	0	0	0	0	0	0	Un-safe	0
B	1052	15	351	4	53	1	53	intergranular	High	12	448	1403	0	0	0	0	0	0	Un-safe	0
C	4059	20	466	8	93	2	95	intergranular	Moderate	10	431	1383	0	0	0	0	0	0	Un-safe	0
D	4193	50	753	20	377	10	387	karstic fissured	Low	1	347	1219	3884	0	3884	122	0	122	Safe	3884
E	149	60	689	19	413	11	425	karstic fissured	Low-moderate	2	288	1079	592	0	592	19	0	19	Safe	296
F	1276	55	779	20	428	11	439	karstic fissured	Low-moderate	2	324	1170	4205	0	4205	133	0	133	Safe	2103
G	1131	25	329	4	82	1	83	intergranular	Moderate	10	459	1428	0	0	0	0	0	0	Un-safe	0
H	420	30	796	23	239	7	246	Aquitard	Ver low	0.1	357	1246	0	0	0	0	0	0	Un-safe	0
I	2670	35	752	21	263	7	271	intergranular	Moderate	10	388	1308	0	0	0	0	0	0	Un-safe	0
15089											8681					274			6283	

I_{eff}: Effective infiltration

LTSM P: Long term seasonal precipitation

P_{eff}: Effective precipitation

LTSM PET: Long term seasonal mean potential evapotranspiration

W.S.: Wet season(November-April)

D.S.: Dry season(May-October)

A: Lithosolic soil in lime stone

B: Gypsiferous alluvium

C: Brown soil, deep phase

D: Rough broken and stony land

E: Rough mountainous land, alpine phase

F: Rough mountainous land

G: Lithosolic soils in sand stone and gypsum

H: Chestnut soil, shallow, stony and sloping phases

I: Brown soils, medium and shallow phase over Bakhtiary gravel